

Flush Mounted Fan Inset



www.ventech.co.nz

VFM190T



Seamless Design meets superior airflow

OUR FAN



A flush wall or soffit mounted extraction fan, with the lowest profile for the capacity in its class. Designed to be mounted to the framing and sealed to the membrane. exterior cladding overlaps sealed flange. Inset exterior cladding into central plaque to finish the look.

An ideal solution for schist stone or cedar finished walls.


SPEEDS

Available as a single or 3 speed fan:


VFM190T-1 Single Speed
VFM190T-3 3 Speed

SPECIFICATIONS


- Backward curve centrifugal rotor with integral 240V 70W 1 or 3 speed motor.
- Performance 130 Lts/sec fid- rated @ 50,000 hrs—IP55.
- Sound data:
 - Speed 1 – 41 dba @ 3m
 - Speed 2 – 50 dba @ 3m
 - Speed 3 – 55 dba @ 3m

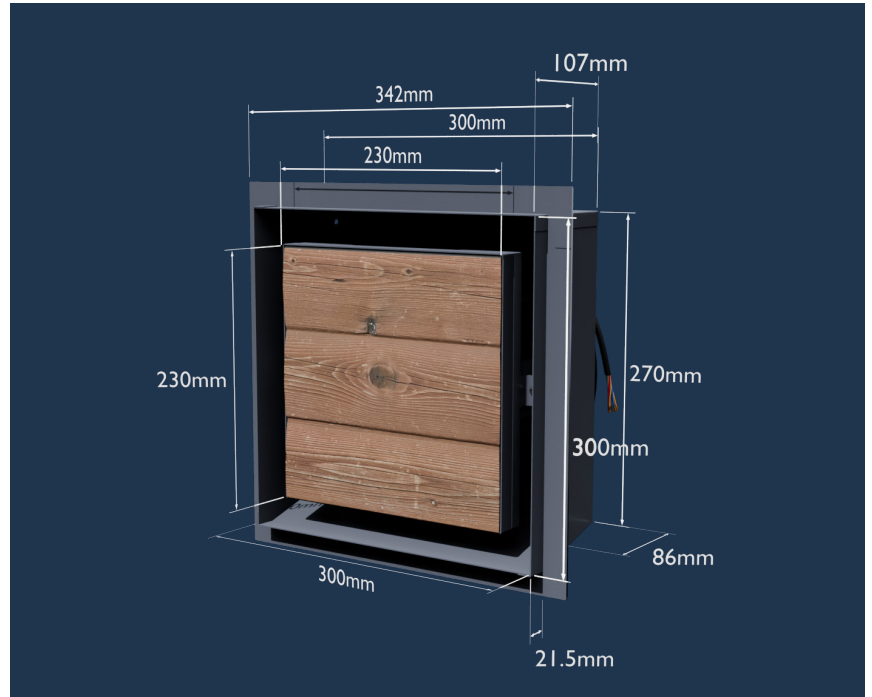

VFM190-1
B2M190-70
Single speed wiring

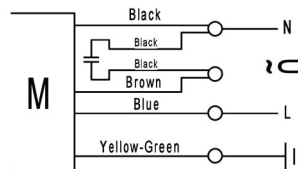

VFM190-3
B2M190-70-3
Three speed wiring

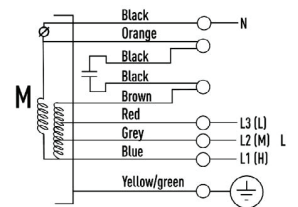

WARNING

Ensure that fan is switched off from supply mains before removing guard. Precautions must be taken to avoid back-flow of gases into room from open flue of gas or other fuel-burning appliances. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent, or similarly qualified persons. Means for disconnection must be incorporated in fixed wiring in accordance with wiring rules. Appliance not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of appliance by person responsible for their safety. Children should be supervised to ensure they do not play with appliance.

GET IN TOUCH

Ventilation Technology Limited
Christchurch, New Zealand

0800 836 832
enquiries@ventech.co.nz
www.ventech.co.nz

